


GOT112A-TWL-WCD NEW

12.1" WXGA TFT Fanless Touch Panel Computer with Intel® Processor N150




- | | |
|----------------------|-------------------------------|
| 1. Power button | 8. COM 1 (RS-232/422/485) |
| 2. AT/ATX switch | 9. COM 2 (RS-232) |
| 3. DC power input | 10. Audio |
| 4. USB Type-C | 11. 3 x antenna hole |
| 5. 2 x 2.5GbE LAN | 12. Lock hole for Type-C port |
| 6. 2 x USB 2.0 | 13. 2.5" SATA SSD storage |
| 7. 2 x USB 3.2 Gen 2 | 14. Flexible I/O Window |

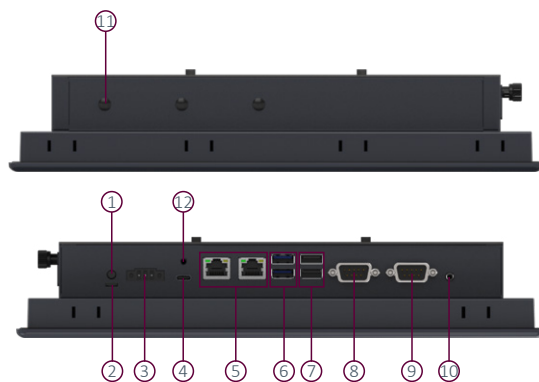


▲ Side view



▲ Rear view



13



14



Fanless



Low Power



LPDDR5



AiRD



IP65



Type-C Display
Output



EAPI



2.5GbE

Features

- 12.1" WXGA TFT LCD, 400 nits with LED backlight, PCAP
- Fanless design with Intel® N-series N150 (Twin Lake), onboard 8GB LPDDR5 memory
- 2 LAN, 4 USB, 1 USB Type C, 2 COM, and 1 Line-out
- Front bezel IP65 & rear cover IP30
- AT/ATX mode selectable via hardware switch
- Supports M.2 2242/2280 M-key (PCIe Gen 3 x2 NVMe), mSATA, and Wi-Fi (6E/7) or 4G LTE
- Supports removable 2.5" SATA SSD storage
- Supports Flexible I/O Window
- Operating temperature: -10°C to +50°C
- Supports panel mount, wall mount, VESA, and desktop stand



Introduction

The GOT112A-TWL-WCD is a 12.1" WXGA TFT fanless touch panel PC powered by the Intel® N150 processor (Twin Lake). Featuring an ultra-slim and lightweight design, it supports an extended operating temperature range from -10°C to +50°C, ensuring reliable performance in demanding environments.

With IP65-rated front bezel protection and MIL-STD-810H compliance, the GOT112A-TWL-WCD delivers exceptional durability and stability. It offers flexible storage options, including NVMe and mSATA, supports wireless connectivity via Wi-Fi 6E/7 or 4G LTE, and provides versatile I/O interfaces with four USB ports, one Type-C port, two Ethernet ports, and two COM ports.

Its fanless and energy-efficient design makes the GOT112A-TWL-WCD an ideal solution for space-constrained applications such as factory automation, machine control, and information display systems.

Specifications

Front Bezel	IP65, NEMA 4 rugged protection, metal front bezel	
LCD Panel	Display Type	12.1" WXGA TFT LCD with LED backlight
	Brightness (cd/m ²)	400 nits
	Resolution	1280 x 800
	Viewing Angel (H/V)	170°/170°
Main System	CPU	Intel® processor N150 4 cores (up to 3.6 GHz)
	System Memory	Onboard 8GB LPDDR5 (16GB by option)
	BIOS	AMI UEFI BIOS
	Storage	1 x M.2 Key M 2242/2280 (PCIe Gen 3 x2 NVMe) 1 x mSATA 1 x removable 2.5" SATA SSD
	Watchdog Timer	65536 levels, 0 to 65535 sec.
	Onboard Graphics	Intel® UHD Graphics
I/O Connector	1 x RS-232/422/485 1 x RS-232 2 x 2.5GbE Ethernet (1226-V, supports UEFI PXE boot and LAN wake-up, w/o TSN) 2 x USB 3.2 Gen 2 2 x USB 2.0 1 x USB Type-C (Gen 2x1, 10Gbps, 5V/3A output, DP 1.4) 1 x power input via 3-pin terminal block connector 1 x power button 1 x AT/ATX DIP switch 1 x Line-out 1 x flexible I/O window (optional)	
TPM	TPM 2.0	
Expansion Interface	1 x M.2 E Key 2230 for wireless (PCIe & USB 2.0) 1 x full-size mini PCIe slot (PCIe/SATA +USB) 1 x Nano SIM card slot	
Touchscreen	Projected capacitive multi-touch	
Power Supply	9 to 36 VDC (typ. 12/24 VDC)	
Power Consumption	50W	
Dimensions (W x D x H)	312.3 x 56.6 x 227.9 mm (12.3" x 2.22" x 8.97")	
Packing Dimensions (W x D x H)	533 x 222 x 463 mm (20.98" x 8.74 x 18.23")	
Weight (net/gross)	4.03 kg (8.88 lbs)/5.73 kg (12.63 lbs)	
Operating Temperature	-10°C to +50°C (+14°F to +122°F)	
Relative Humidity	10% to 95% @ +40°C, non-condensing	
Shock & Vibration	Vibration (operating): MIL-STD-810H, Method 514.8, Category 20, and Figure 514.8C-2 Shock (operating): MIL-STD-810H, Method 516.8, Table 516.8-I, and Procedure I	
Certifications	CE Class A, IEC/EN 61000-6-4, IEC/EN 61000-6-2 (heavy industrial grade) UKCA FCC 47 CFR Part 15 Subpart B (Class A) RoHS standard	

Ordering Information

Standard

GOT112A-TWL-WCD (P/N: E22B112A00)	12.1" WXGA 400 nits fanless touch panel computer with Intel® processor N150, onboard 8GB LPDDR5, projected capacitive multi-touch screen, 9 to 36VDC power input via 3-pin terminal block connector
--------------------------------------	---

* Other configuration by request

* Specification and certifications may vary based on different requirements

Packing List

1 x GOT112A-TWL-WCD

Optional Accessories

Wi-Fi + Bluetooth kit

E29R131113	Panel mount kit
E29R131115	Wall mount kit
E226171119	Stand kit
E392902103	AX92902 full-size PCI Express Mini module with Gigabit LAN
E392903102	AX92903 full-size PCI Express Mini module with CAN bus
E392906101	AX92906 full-size PCI Express Mini module with 2 COM
E392918103	AX92918 full-size PCI Express Mini module with 2 Gigabit LAN
509000005500	Adapter 60W/24V FSP060-DAAN3

Optional OS Installation

Windows® 11, Windows® 11 IoT, and Linux

Dimensions

